

PATENT APPLICATION
Docket No.: NC 82,591

AMENDMENTS TO THE CLAIMS

This listing of claims will replace all prior versions and listings of claims in the application.

1. (currently amended) A composition comprising:
a composition having iron nanoparticles dispersed homogeneously throughout said composition, wherein said composition is formed by heating to a temperature of from about 300°C and above a mixture of:
a ferrocenylethynyl containing composition component selected from the group consisting of 1,4-bis(ferrocenyl)butadiyne, 1-ferrocenylethynyl-4-(phenylethynyl)benzene and 1,3-bis(ferrocenylethynyl)benzene; and
an aromatic-acetylene containing composition component selected from the group consisting of 1,2,4,5-tetrakis(phenylethynyl)benzene, 1,2,4-tris(phenylethynyl)benzene and 1,3,5-tris(phenylethynyl)benzene; and
wherein said ferrocenylethynyl containing composition component and said aromatic-acetylene containing composition component are in molar mix proportions of between 1 and 99 of said ferrocenylethynyl containing composition component and between 99 and 1 of said aromatic-acetylene containing composition component.
2. (currently amended) The mixture composition of claim 1, wherein said mixture is heated to a temperature of from about 400°C.
3. (currently amended) The mixture composition of claim 1, wherein said mixture is heated to a temperature of from about 500°C.
4. (currently amended) The mixture composition of claim 1, wherein said mixture is heated to a temperature of from about 600°C.
5. (currently amended) The mixture composition of claim 1, wherein said mixture is heated to a temperature of from about 700°C.

PATENT APPLICATION
Docket No.: NC 82,591


6. (currently amended) The mixture composition of claim 1, wherein said mixture is heated to a temperature of from about 800°C.
7. (currently amended) The mixture composition of claim 1, wherein said mixture is heated to a temperature of from about 900°C.
8. (currently amended) The mixture composition of claim 1, wherein said mixture is heated to a temperature of from about 1000°C and above.
9. (currently amended) The mixture composition of claim 1, wherein said mixture is heated to a temperature greater than about 300°C and held at said temperature for at least one hour.
10. (currently amended) The mixture composition of claim 1, wherein said ferrocenylethynyl containing composition component and said aromatic-acetylene containing composition component are in molar mix proportions of between 10 and 75 of said ferrocenylethynyl containing composition component and between 90 and 25 of said aromatic-acetylene containing composition component
11. (currently amended) A method of forming a composition containing iron nanoparticles homogeneously dispersed throughout, said method comprising the steps of: mixing between 1 and 99 molar proportion of 1,4-bis(ferrocenyl)butadiyne and between 99 and 1 molar proportion of said an aromatic-acetylene containing composition component selected from the group consisting of 1,2,4,5-tetrakis(phenylethynyl)benzene, 1,3,5-tris(phenylethynyl)benzene and 1,2,4-tris(phenylethynyl)benzene; heating said mixture for at least 1 hour at between 300 and 1000°C; and forming a thermoset or a carbon composition having metal nanoparticles dispersed homogeneously throughout.

PATENT APPLICATION
Docket No.: NC 82,591



12. (original) The method of claim 11, wherein said metal nanoparticles have a size of greater than 1 nm.
13. (original) The method of claim 11, wherein there is a decrease in the weight of said mixture of less than 20% when said mixture is heated.
14. (original) The method of claim 11, further comprising the step of controlling the temperature and time duration at said temperature thereby providing control over the size of the metal nanoparticle.
15. (original) The method of claim 11, further comprising the step of forming thermoset fibers.
16. (currently amended) The method of claim 11,
wherein said mixing is between 10 and 75 molar proportion of said 1,4-bis(ferrocenyl)butadiyne and between 90 and 25 molar proportion of said aromatic-acetylene containing ~~composition~~ component;
~~heating said mixture for at least 1 hour at between 300 and 1000°C; and~~
forming a thermoset or a carbon composition having metal nanoparticles dispersed homogeneously throughout.

PATENT APPLICATION
Docket No.: NC 82,591

17. (currently amended) A composition formed by heating to a temperature of from about 300°C and above a mixture of:
 an organometallic composition component and an aromatic-acetylene containing compound component; [[and]]
 wherein said organometallic composition component comprises the formula:

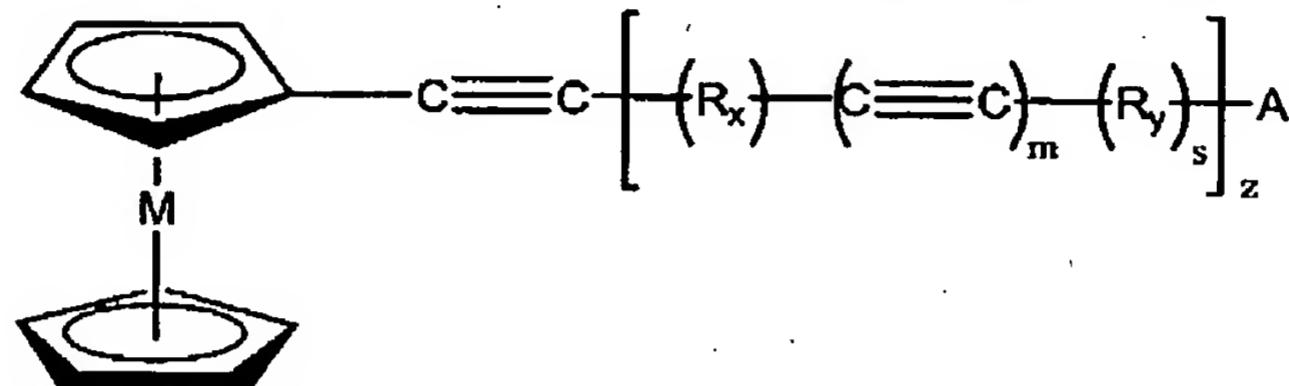

wherein A is selected from the group consisting of H,

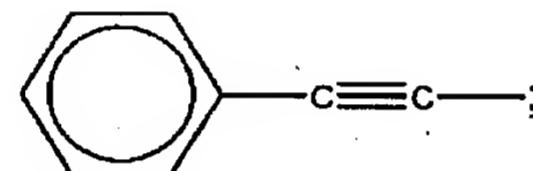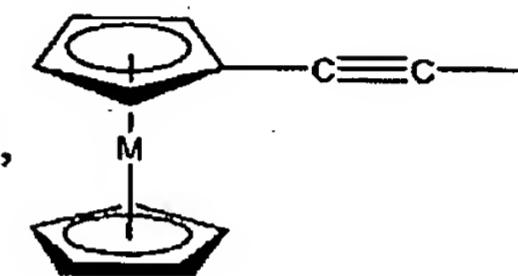

wherein M is a metal selected independently from the group consisting of Fe, Mn, Ru, Co, Ni, Cr and V;

wherein [[Rx]] Rx is independently selected from the group consisting of an aromatic, a substituted aromatic group and combinations thereof;

wherein [[Ry]] Ry is independently selected from the group consisting of an aromatic, a substituted aromatic group and combinations thereof;

wherein m is ≥ 0 ;

wherein s is ≥ 0 ;

wherein z is ≥ 0 ;

wherein m and s are independently determined in each repeating unit;

wherein said aromatic-acetylene containing composition component is selected from the group consisting of 1,2,4,5-tetrakis(phenylethynyl)benzene and 1,3,5-tris(phenylethynyl)benzene; and

PATENT APPLICATION
Docket No.: NC 82,591

wherein said organometallic composition component and said aromatic-acetylene containing composition component are in molar mix proportions of between 1 and 99 of said organometallic composition component and between 99 and 1 of said aromatic-acetylene containing composition component.

18. (currently amended) The composition of claim 17,
wherein said organometallic composition component and said aromatic-acetylene containing composition component are in molar mix proportions of between 10 and 75 of said organometallic composition component and between 90 and 25 of said aromatic-acetylene composition component.
19. (new) The composition of claim 16, wherein the heating step comprises heating for at least one hour at between 300 and 1000°C.